

POWER YOUR WORLD

ONAN P4500IDF

4,500-Watt Dual Fuel Digital Inverter Portable Generator

Gas: 3,700 Running Watts | 4,500 Peak Watts

Propane: 3,330 Running Watts | 4,050 Peak Watts



DIGITAL INVERTER GENERATOR

Efficient, clean energy that requires little maintenance



PUSH BUTTON & REMOTE START

Pull cord backup



QUIET & DURABLE

Double insulated



PARALLEL CAPABLE

Parallels with another P4500I or P2500I inverter generator



DUAL FUEL WITH JUST THE FLIP OF A SWITCH



Easily switch from gas to propane with a fuel capacity of 3.4 gallons



LIGHTWEIGHT

At 104.7 lbs, and with a telescopic handle and wheels, it's lighter and easier to manage



United States and Canada Model

FEATURES

- RV- and camper-ready with 30A TT-30R outlet
- Two 5V USB ports for charging sensitive electronics such as phones or tablets
- Telescoping handle for easy transportation
- Dependable 224 cc OHV 4-stroke Cummins Onan engine
- 3-year warranty




**FOR
A WORLD
THAT'S
ALWAYS ON™**

SPECIFICATIONS

Part Number	A068H732
Gasoline – Peak Watts	4,500
Gasoline – Running Watts	3,700
Gasoline – Peak Amps at 120V	37.5 amps
Gasoline – Running Amps at 120V	30.8 amps
Propane – Peak Watts	4,050
Propane – Running Watts	3,330
Propane – Peak Amps at 120V	33.8 amps
Propane – Running Amps at 120V	27.8 amps
AC Voltage	120 volts
DC Voltage	5 volts
AC Frequency	60 Hz
Parallel Capable	Yes
Total Harmonic Distortion (THD)	≤3%
Starting System	Electric, remote, recoil
Battery Included	Yes
Battery Charger Included	Yes
Remote Start Fob Included	Yes (paired at factory)
Remote Start Distance (yards/meters)	33 yd (30 m)
Engine Displacement	224cc
Engine Brand	Cummins Onan
Engine Type	OHV 4-stroke
Engine Speed	Variable
Operational Volume	As low as 52 dBA
Carburetor Kit Required to Operate at Altitude	Yes, above 2,000 ft
Economy Mode Switch	Yes
Built-In Inverter	Yes
Engine Lubrication	Splash
Recommended Oil	SAE 10W-30
Oil Bottle Size (included)	.63 qt / 20.3 oz
Oil Capacity (quarts/ounces)	.63 qt / 20.3 oz
Low Oil Shutdown	Automatic
4500IDF Fuel Type	Propane or 87 - 93 octane
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (gallons/liters)	3.4 gal (12.8 L)
Gasoline – Run Time at 25% Load (hrs)	12.5 hrs
Gasoline – Run Time at 50% Load (hrs)	8.2 hrs
Propane – Run Time at 25% Load (hrs) with 20 lb Standard Propane Tank 4.6 gal	15 hrs
Fuel Gauge	Yes
Choke Type	Automatic
AC Outlets	(1) 120V 30A (TT-30R) (1) Duplex 120V 20A (5-20R)
DC Outlets	(2) 5V USB ports
Ground	Floating neutral

Covered Outlets	Yes
Manual Transfer Switch Ready	No
GFCI Outlets	No
LED Data Center	Yes
RV-Ready Outlet	Yes
Overload Protection (circuit breaker)	Yes
Handle Style	Telescoping handle
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Wheel Kit Included	Yes (assembled)
Wheel Size	5.5 in diameter, 1.5 in wide/thick
Spark Arrestor	Yes
Residential Warranty	3 years
Commercial Warranty	1 year
Assembled Length in (mm)	25.5 in (648 mm)
Assembled Width in (mm)	18.12 in (460 mm)
Assembled Height in (mm)	20.5 in (520 mm)
Carton Length in (mm)	29.6 in (660 mm)
Carton Width in (mm)	21.5 in (546 mm)
Carton Height in (mm)	24.5 in (622 mm)
Dry Unit Weight lb (kg)	104.7 lb (47.6 kg)
Shipping Weight lb (kg)	126.5 lb (57.5 kg)

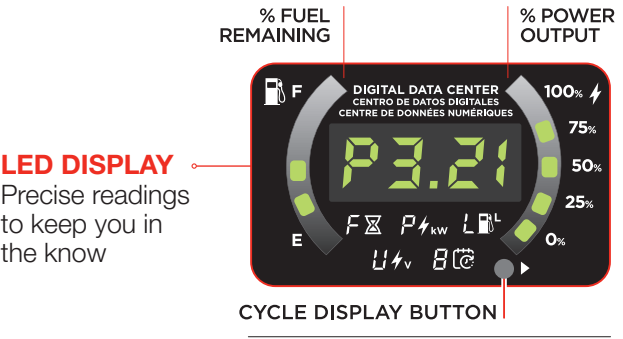

LED DISPLAY
Precise readings to keep you in the know

Display Information

F9.31	P1.21	2.8L	U122	22:31
REMAINING RUN TIME	POWER OUTPUT (kW)	FUEL LEVEL (Liters)	VOLTAGE	LIFETIME RUN HOURS



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

cummins.com

Bulletin 6382761 Produced in U.S.A. 3/22
©2022 Cummins Inc.